

STRIP MODULE IP66

The STRIP MODULE System is an essential tool in linear lighting. Available with a range of optics or as a non-optic extrusion, this family of strips provides an ideal solution for illuminating building facades, walls, coves, windows and more.


High power LEDs and market leading technology ensure these modules offer a highly impressive output at 350mA together with CRI of up to 90Ra with 2 step McAdam control.

The unique extruded clip system means that all components secure tightly together to seal the finished product to a guaranteed IP66 rating as standard, therefore making it suitable for both interior and exterior applications. Further accessories including glare shields, cowls, adjustable brackets and customised accessories are available.






All fixtures are available with dimmable drivers in DMX or DALI variants. Single colour units are also available as switched TRIAC or 1 - 10V.

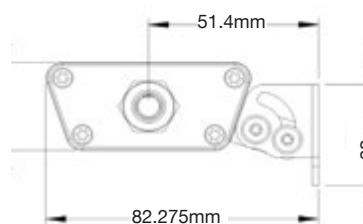

IP66 plus rated drive systems are available on request.



Colours Available

 RGBW	 RGB
 Red	Cool White - 5000K, 6000K
 Green	Neutral White - 4000K
 Blue	Warm White - 2200K, 2700K, 3000K

Optics Available

11°, 32°, 14° x 34 (OV), 120°

Product Code

TRL - 400 -	RGBW - 27K -	CRI80 - 11 -	IP66
600	WWH 30K	CRI90	32
800	NWH 40K		OV
1200	CWH 45K		120
	50K		
	60K		
	VARI		
	RGB		
	RED		
	GRN		
	BLU		
	AMB		

Product Code Example:

TRY-400-RGBW-40K-CRI80-OV-IP66

Technical Specification				
Length	406mm	606mm	806mm	1206mm
Number of LEDs	16	18	24	36
System Power Consumption	12W	18W	24W	36W
Available Colours	RGB, RGBW Variwhite Single Colour	RGB Variwhite Single Colour	RGB, RGBW Variwhite Single Colour	RGB, RGBW Variwhite Single Colour
Lumen Output	1120lm (2700K), 1390lm (3000K), 1700lm (4000K), 1810lm (6000K)	1685lm (2700K), 2090lm (3000K), 2555lm (4000K), 2715lm (6000K)	2245lm (2700K), 2785lm (3000K), 3400lm (4000K), 3620lm (6000K)	3370lm (2700K), 4175lm (3000K), 5110lm (4000K), 5435lm (6000K)
CRI	Ra80 Standard		Ra90 Optional	
Dimmability	DMX, TRIAC, 1-10V, DALI dimming			
Driver	Remote			
Input Current	350mA			
Input Voltage	48V DC			
Housing	Anodised Aluminium			
Diffuser	Extruded PMMA			
Weight	0.85kg	1.2kg	1.45kg	2.1kg
IP Rating	IP66			
Lamp Life L70	50,000hrs			
Operating Ambient Temperature	-10°C to +55°C			

As part of our continuous product development we reserve the right to amend these specifications without prior notice.

Tryka L.E.D. Ltd., Unit 3 Station Works, Station Road, Shepreth, Nr. Royston, Herts, U.K SG8 6PZ. Tel: +44 (0) 1763 260666 www.tryka.com