


CONTINUITY TJW

CONTINUITY-TJW is the smallest variant of this product family. Designed to provide a low profile homogeneous lighting effect with high illuminance. Ensuring the product is well suited to general lighting and direct viewing applications.

Measuring 10x10mm in single colour or 12x12mm for Tuneable White or RGB variants and providing a 270-degree beam angle from a fully diffused, extruded silicone body, giving extended durability and an incredibly tight bending radius of 40mm.

The high-grade, white silicon jacket is fully sealed to an IP67 rating, ensuring suitability for use in both interior and exterior applications.

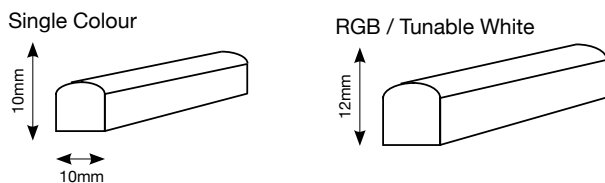

Technical Specification	
Voltage	24V DC
Power Consumption/m	12W
Luminaire Luminous Flux/m	800lm(2700K)
	900lm(3000K)
	1000lm(4000K)
Housing Material	Silicone
Bending Direction	Top and back
Bending Radius	40mm
Beam Angle	270°
Cutting Length	25mm for Single Colour 50mm for RGB / Tunable White
Dimmable	DALI, 1-10V, TRIAC or DMX
LED Type	SMD 2835
Max Weight	65g/m
IK Rating	IK05
IP Rating	IP67
Lamp Life	50,000 hours
Storage Temperature	-45°C to +85°C
Operating Ambient Temp.	-20°C to +60°C

Colours Available

● ● ● RGB / Tunable White	Cool White - 6000K, 6500K
● Red	Neutral White - 4000K, 4500K, 5000K
● Green	Warm White - 2700K, 3000K
● Blue	● Amber

Optics Available

270°


A range of mounting profiles, connectors and cabling accessories are also available.

Features:

- 3 step MacAdam ellipse
- 270° Beam Angle
- Top and back bending
- 40mm bending radius
- UV Resistant
- Non-yellowing
- Fireproof
- Custom wattage can be offered on request

CONTINUITY TJW continued..

Cable Entry Options

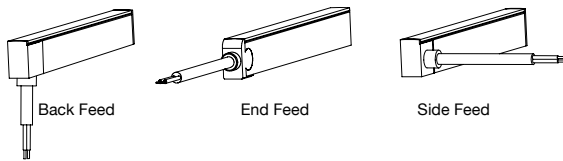


Bending Direction



CONTINUITY TJW can be bent vertically

Cross Section with Extrusion



Product Code

TRY-CONTINUITY-TJW-YYY-LL

Replace YYY with 27K, 30K, 40K, 50K, 60K, 65K, AMB, RED, BLU, GRN, RGB

Replace LL with required length (max. 5M with increment of 25mm for single colour and 50mm for RGB or Tunable White)

Accessories

TRY-CONTINUITY-TJW-AA-LL Cable entry

Replace AA with BF for Back Feed, SF for Side Feed, EF for End Feed

Replace LL with required length of cable (0.15m, 0.3m, 1m, 3m, 5m)

TRY-CONTINUITY-TJW-ENDCAP Silicon End cap

TRY-CONTINUITY-TJW-PVC-CH-1M Flexible PVC profile 1M

TRY-CONTINUITY-TJW-SCLIP Transparent Silicon Clip