


AURA 5

The smallest of our AURA family, the AURA5 is an AR111 sized LED luminaire suitable for interior or exterior applications.

The fixture is supplied as standard in an IP67 version, with adjustable 'U' bracket. Available in RGB, RGBW, Single Colour, Vari-White or with bespoke LED combinations. High efficacy optics and latest generation high brightness Cree XP-E2 LEDs ensure our AURA family offers market leading colour mixing and excellent luminous efficacy.

The unit is sealed with a ventilated IP rated gland fitted to the back of the module, to which a 5m RJ45 terminated flying lead is connected. Our innovative ventilated cable gland ensures the IP67 rating through simultaneous pressure compensation. A waterproof filter inside the cable gland prevents condensation from forming within the fitting by allowing the humidity to escape, whilst blocking water and dirt from entering the module thereby guaranteeing the Tryka fixture performance regardless of the climate. The unit can also be installed without brackets as a replacement of PAR36 or AR111 fixtures. A variety of recessed, surface or inground housings are available to complement this product.

Glare shields, cowls, height adjustable brackets and domed diffusers are available.

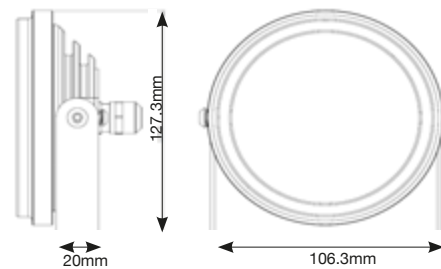

Technical Specification	
Number of LEDs	12
System Power Consumption	12W
Lumen Output	1120lm (2700K), 1390lm (3000K) 1700lm (4000K), 1810lm (6000K)
CRI	Ra80 Standard Ra90 Optional
Dimmability	DMX, TRIAC, 1-10V, DALI
Driver	Remote
Input Current	350mA
Input Voltage	48V DC
Housing	Anodised Aluminium
Diffuser	Clear Toughened Glass Dome
Weight	0.75KG
IP Rating	IP67
Lamp Life L70	50,000hrs
Operating Ambient Temp.	-10°C to +55°C

Colours Available

Cool White - 5000K, 6000K			
Neutral White - 4000K			
Warm White - 2200K, 2700K, 3000K			
VariWhite - 2200K/6000K			
● Red	● Green	● Blue	● Amber
● ● ● RGB / RGBW			

Optics Available

12°, 23°, 36°, 120° Opal Diffused

Product Code

TRY -M12 - XXX - CRI80- YY - IP67

TRY-M12-BEZ-COWL, TRY-M12-DIFF-DOME

NOTES:

1. Replace XXX with 27K, 30K, 40K, 45K, 50K, 60K, RED, GRN, BLU, AMB, RGB, RGBW

2. Replace YY with 12, 23, 36, 120

3. For RGBW please specify colour temperature for white LED

NOTE: Replace each X with choice of colours.

Product Code Example:

TRY-M12-RGBW27K-CRI90-36-IP67



As part of our continuous product development we reserve the right to amend these specifications without prior notice.

Tryka L.E.D. Ltd., Unit 3 Station Works, Station Road, Shepreth, Nr. Royston, Herts, U.K. SG8 6PZ. Tel: +44 (0) 1763 260666 www.tryka.com