

AURA 7




EXTERIOR

The largest of our AURA family, the AURA 7, is an LED luminaire suitable for interior or exterior applications. With 2 different outputs from 36W to 48W and a full range of colour variants.

The fixture is supplied as standard in an IP67 version, with adjustable 'U' bracket. Available in RGB, RGBW, Single Colour, VariWhite or with bespoke LED combinations. High efficacy optics and latest generation high brightness Cree XP-E2 LEDs ensure our Aura family offers market leading colour mixing and excellent luminous efficacy.

The unit is sealed with a ventilated IP rated gland fitted to the back of the module, to which a 5m RJ45 terminated flying lead is connected. Our innovative ventilated cable gland ensures the IP67 rating through simultaneous pressure compensation. A waterproof filter inside the cable gland prevents condensation from forming within the fitting by allowing the humidity to escape, whilst blocking water and dirt from entering the module thereby guaranteeing the Tryka fixture performance regardless of the climate.

Glare shields, cowls, height adjustable brackets and customised accessories are also available.

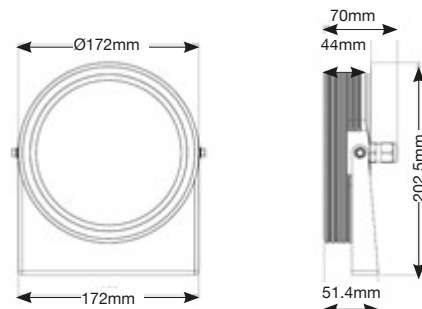

Technical Specification		
Number of LEDs	36	48
System Power Consumption	36W	48W
Available Colours	RGB, RGBW, Variwhite, Single Colour	RGBW, Variwhite, Single Colour
Lumen Output	3370lm (2700K), 4175lm (3000K), 5110lm (4000K), 5435lm (6000K)	4495lm (2700K), 5570lm (3000K), 6815lm (4000K), 7250lm (6000K)
CRI	Ra80 Standard , Ra90 Optional	
Dimmability	DMX, TRIAC, 1-10V, DALI	
Driver	Remote	
Input Current	350mA	
Input Voltage	48V DC	
Housing	Anodised Aluminium	
Diffuser	Clear Toughened Glass	
Weight	1.95kg	
IP Rating	IP67	
Lamp Life L70	50,000hrs	
Operating Ambient Temperature	-10°C to +55°C	

Colours Available

Cool White - 5000K, 6000K			
Neutral White - 4000K			
Warm White - 2200K, 2700K, 3000K			
VariWhite - 2200K/6000K			
• Red	• Green	• Blue	• Amber
• • • RGB / RGBW			

Optics Available

12°, 23°, 36°, 120° Opal Diffused

Product Code

TRY - M36- M48	RGBW - 27K - CRI80 - 12 - IP67
	WWH 30K CRI90 23
	NWH 40K 36
	45K OPAL
	CWH 50K
	60K
	VARI
	RGB
	RED
	GRN
	BLU
	AMB
	TRY-M36-BEZ-COWL

Product Code Example:
TRY-M36-RGB-36-IP67

As part of our continuous product development we reserve the right to amend these specifications without prior notice.

Tryka L.E.D. Ltd., Unit 3 Station Works, Station Road, Shepreth, Nr. Royston, Herts, U.K SG8 6PZ. Tel: +44 (0) 1763 260666 www.tryka.com